




# Vacuum Bag Sealant Tape

Tygavac Vacuum Bag Sealant Tapes are used to form a seal between the vacuum bagging film and the moulding tool surface. They are supplied in the form of an extruded mastic tape which has the capability of forming a strong bond to a wide range of film types and tool surface. All the sealant tapes offered by Tygavac have been specially developed for use in vacuum bag moulding processes.

Tygavac Product	Application	Colour	Roll Size	Maximum Service Temp (°C)
DBT 101	low temp/de-bulking	teak	3mm x 12mm x 15m	80
AT 90B	economical de-bulk	black	3mm x 12mm x 15m	90
AT 140	economical multi-purpose	white	3mm x 12mm x 15m	140
VBS 300	125°C cure cycles	white	3mm x 12mm x 15m	140
VBS 500	general purpose	black	3mm x 12mm x 15m	205
VBS 550	economical multi-purpose	black	3mm x 12mm x 7.6m	240
VBS 750	ultra high temp/ thermoplastic moulding	brown	3mm x 18mm x 10m	400

Custom sizes available on request.

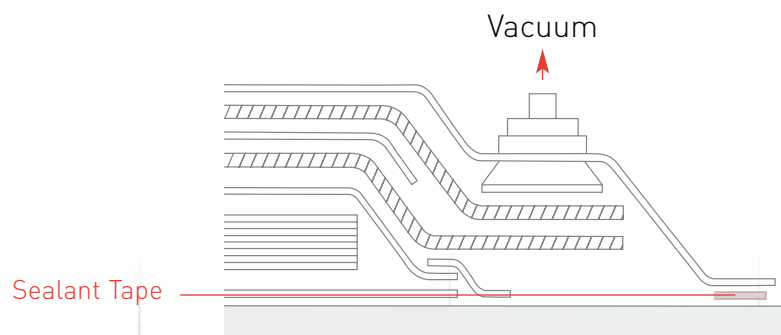

All statements, technical information and recommendations contained in this publication are based on tests believed to be reliable, but their accuracy and/or completeness are not guaranteed. The user shall determine the suitability of the product for his particular purpose and shall assume all risk and liability in connection therewith. All products are sold subject to Tygavac Advanced Materials standard Conditions of Sale.

**TYGAVAC**  
ADVANCED MATERIALS LTD

'Tygavac' is a registered trade mark.  
2002 - 7 - 2 - 1

VACUUM BAG SEALANT TAPE