


VP 6000 Electrically operated, portable vacuum pump

The Tygavac VP6000 Vacuum Pump is unique for the high level of performance obtained from such a compact unit. It is ideal for use as either a primary or back-up vacuum source. Using the rotary vane principle it is capable of providing a vacuum force of up to 0.998 bars. They are oil flooded but do not emit any oil from the exhaust port, making them clean and economical to run. Manufactured from a specially designed alloy, the weight of the unit is kept to a minimum in order to enhance its portability.

As standard the vacuum pumps are fitted with a Tygavac 440TF plug for quick connection to a vacuum line. Other standard features include an inlet filter, exhaust silencer, non-return valve and an oil mist eliminator.

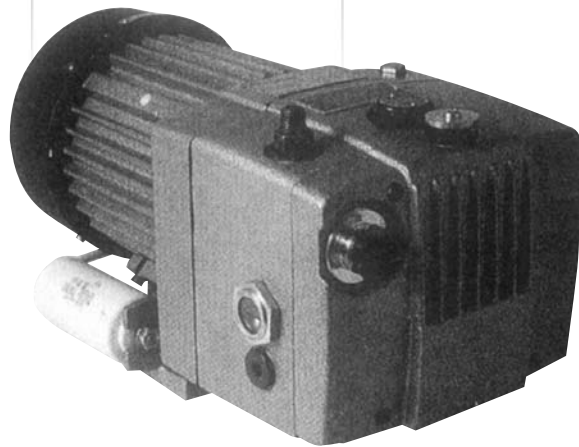

Typical Specifications

Maximum vacuum force	0.998 bars
Maximum vacuum flow	5.5m ³ /hour
Power supply	220V/50Hz single phase
or	220V/380V/50Hz three phase
Approx weight	12.6Kg
Approx dimensions	365mm x 216mm x 200mm

+ All statements, technical information and recommendations contained in this publication are based on tests believed to be reliable, but their accuracy and/or completeness are not guaranteed. The user shall determine the suitability of the product for his particular purpose and shall assume all risk and liability in connection therewith. All products are sold subject to Tygavac Advanced Materials standard Conditions of Sale.

TYGAVAC
ADVANCED MATERIALS LTD

"Tygavac" is a registered trade mark.
2002 - 7 - 9 - 10