


## PS Tapes - General Purpose

The Tygavac range of general purpose pressure sensitive adhesive tapes is a fully comprehensive range suitable for all holding, masking and flashbreaking applications encountered in vacuum bag moulding at temperatures up to 400°C.



Tygavac Product	CarrierType/ Thickness (mm)	Adhesive Type	Maximum Use Temp (°C)	Application	Width (mm)
PS 025	polyester/0.025	fully cured silicone	205	holding/masking	25, 50
PS 050	polyester/0.050	fully cured silicone	205	holding/masking flashbreaking	25, 50
PS 125	polyester/0.125	fully cured silicone	205	flashbreaking	25, 50
PDA 025	polyester/0.025	acrylic/double - sided	205	holding	25, 50
HC 10	fabric/0.30	rubber resin	100	holding down honeycomb during machining	50
KS 700	polyimide/0.025	fully cured silicone	400	holding/masking	25, 50

Other widths available on request.

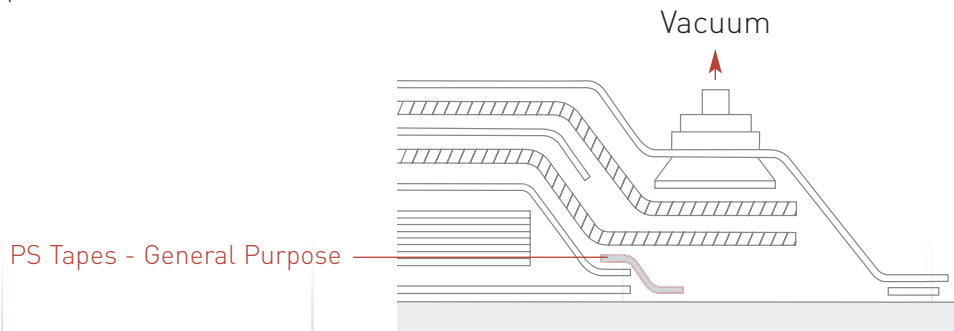

All statements, technical information and recommendations contained in this publication are based on tests believed to be reliable, but their accuracy and/or completeness are not guaranteed. The user shall determine the suitability of the product for his particular purpose and shall assume all risk and liability in connection therewith. All products are sold subject to Tygavac Advanced Materials standard Conditions of Sale.

**TYGAVAC**  
ADVANCED MATERIALS LTD

'Tygavac' is a registered trade mark.  
2002 - 7 - 8 - 0

PS TAPES - GENERAL PURPOSE